


MINISPLIT
AURORA
SEER 17.5



Certified
by AHRI

AHRI CERTIFIED
www.ahridirectory.org

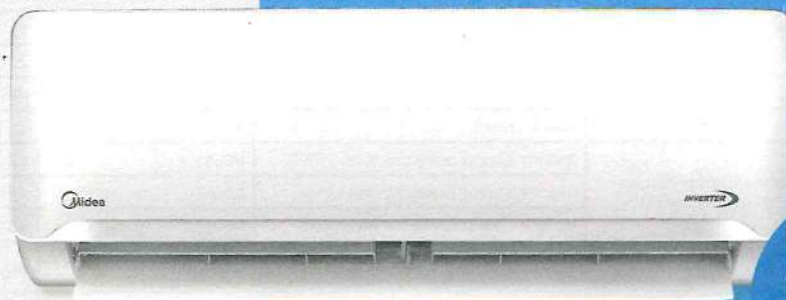

Compresor
Inverter



Modo
ECO



Garantía
Extra

CARACTERÍSTICAS

Refrigerante R410a

Triple Comfort:

Compresor Inverter: Ahorra hasta un 70% de energía. *

Modo ECO: Ahorro adicional de energía.

Garantía Extra: Mayor plazo de garantía total.

Prime Guard: Prolonga la vida del condensador, protegiéndolo de la corrosión.

Auto-Protección: Bloqueo automático en caso de variación de voltaje.

Diseño Diamante: Condensadora de mayor resistencia.

Filtro Anti-Polvo: Hasta 50% mayor poder anti-polvo resistencia.

Turbo: Temperatura de confort en menor tiempo.

Auto-ajuste Nocturno: Noches más agradables.

Sensor Sígueme: La temperatura precisa en tu control.

2 años de garantía completa en sus partes y componentes y 10 años de garantía en el compresor.

*Comparado con minisplit convencional en las mismas condiciones de operación en laboratorios Midea.

Los resultados pueden variar dependiendo del modelo, las condiciones de operación y del medio ambiente.

	Indoor Model		MSABF-36HRFNX-MQOW
	Outdoor Model		MOD31-36HFNT-MPOW
Power supply	Voltage type	/	208/230V,1Ph
	Supply frequency	/	60Hz
Cooling	Capacity	Btu/hr	9474-38713
	Input	W	4235
	Current	A	18.5
Heating	Capacity	Btu/hr	21500-38000
	Input	W	3835
	Current	A	16.7
	COP	W/W	2.75
Max.Input consumption	Max.Input consumption	W	4800
Max.Current	Max.Current	A	21
Indoor sound pressure level(Hi/Mi/Lo/Si)	Indoor sound pressure level(Hi)	dB(A)	52
	Indoor sound pressure level(Mi)	dB(A)	44
	Indoor sound pressure level(Lo)	dB(A)	36
Outdoor sound pressure level(Hi)	Outdoor sound pressure level(Hi)	dB(A)	60.5
Refrigerant piping	Liquid side	/	9.52mm(3/8in)
	Gas side	/	15.9mm(5/8in)
	Max. refrigerant pipe length(single)	m	65
	Max. refrigerant pipe length(more)	m	/
	Max. difference in level	m	30
Compressor	Model	/	ATF250D22UMT
	Type	/	ROTARY
	Brand	/	GMCC
	Capacity	W	7645
	Input	W	2080
	Rated current	A	9.45
	Refrigerant oil/oil charge	mL	VG74/670
Outdoor Fan motor	Model	/	ZKFN-120-8-2
	Input	W	150.0
	RLA (Rated current)	A	1.39
	Speed(High/Mi/Low)	r/min	900/750
Condenser	Number of rows	/	3.0
	Tube outside dia	mm	φ7
	Tube outside type	/	Inner groove tube
	Tube pitch(a)x row pitch(b)	mm	21x13.37
	Fin spacing	mm	1.4
	Fin type (code)	/	Hydrophilic aluminum
	Coil length x height x width	mm	1000x756x40.11
	Number of circuits	/	6
Outdoor side air flow(Hi)	Outdoor side air flow(Hi)	m ³ /h	3800
Dimension(W*D*H)	Body_Length(W)	mm	946
	Body_Width(D)	mm	410
	Body_Height(H)	mm	810
Packing(W*D*H)	Packing_Length(W)	mm	1090
	Packing_Width(D)	mm	500
	Packing_Height(H)	mm	885
Net/Gross weight	Net weight	Kg	65.2
	Gross weight	Kg	71.5
Refrigerant	Refrigerant type	/	R410A
	Refrigerant charge	/	119.9
	Additional refrigerant per metre	g/m	20
		oz/ft	0.21